




NTN Bearing Manufacturing

INA TASE20-N bearing units

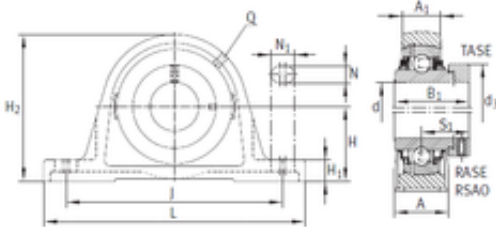

TASE20-N Bearing 2D drawings and 3D CAD models

Bearing No. TASE20-N

Bore Diameter	20 mm
d	20 mm
S1	26,6 mm
Thread (Q)	Rp1/8
d3	33 mm
A	32 mm
A1	19 mm
B1	43,7 mm
H	33,3 mm
H1	14,5 mm
H2	64 mm
J	97 mm
L	130 mm
N	11 mm
N1	19 mm
Weight	0,63 Kg
Basic dynamic load rating (C)	12,8 kN
Category	Pillow Block Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	0.742
Product Group	M06110
Number of Mounting Holes	2
Mounting Method	Eccentric Collar
Housing Style	2 Bolt Pillow Block



NTN Bearing Manufacturing

Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Relubricatable	Yes
Insert Part Number	GE20KPPB3
Seals	Double Triply
Housing Configuration	1 Piece Solid
Inch - Metric	Metric
Other Features	Single Row Standard Shaft Height With Set Screw
Long Description	2 Bolt Pillow Block; 20MM Bore; 33.3MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 87MM Minimum Bolt Spacing; 105MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Triply; Non
Category	Pillow Block
UNSPSC	31171511
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Pillow Block
Manufacturer URL	http://www.ina.com
Manufacturer Item Number	TASE20N
Weight / LBS	1.323
Bolt Spacing Maximum	4.134 Inch 105Millimeter
Base to Center Height	1.311 Inch 33.3 Millimeter
Nominal Bolt Center to Center	3.8 Inch 97 Millimeter
Actual Bolt Center to Center	0 Inch 0Millimeter
Bolt Spacing Minimum	3.425 Inch 87Millimeter
Bore	0.787 Inch 20 Millimeter



NTN Bearing Manufacturing

Length Thru Bore	1.72 Inch 43.7 Millimeter
------------------	-----------------------------