




NTN Bearing Manufacturing

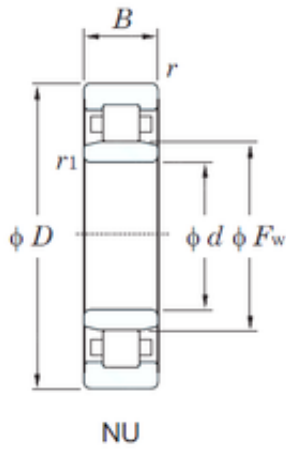

20 mm x 47 mm x 18 mm KOYO NU2204 cylindrical roller bearings

Bearing No. NU2204

NU2204 Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|-------------|
| Size | 20x47x18 mm |
| Bore Diameter | 20 mm |
| Outer Diameter | 47 mm |
| Width | 18 mm |
| d | 20 mm |
| Fw | 27 mm |
| D | 47 mm |
| B | 18 mm |
| C | 18 mm |
| r min. | 1 mm |
| r1 min. | 0.6 mm |
| Weight | 0.146 Kg |
| Basic dynamic load rating (C) | 20.7 kN |
| Basic static load rating (C0) | 18.4 kN |
| (Grease) Lubrication Speed | 13000 r/min |
| Bearing No. | NU2204 |
| r(min) | 1 |
| r1(min) | 0.6 |
| Cr | 27.8 |
| C0r | 18.4 |
| Cu | 2.70 |
| Grease lub. | 13000 |
| Oil lub. | 18000 |
| Ew | - |
| d1 | - |



NTN Bearing Manufacturing

| | |
|------------------|-------|
| B1 | - |
| B2 | - |
| da(min) | - |
| db(min) | 24 |
| db(max) | 26 |
| dc(min) | - |
| dd(min) | - |
| Da(max) | 42 |
| Db(max) | - |
| Db(min) | - |
| ra(max) | 1 |
| rb(max) | 0.6 |
| (Refer.)Mass(kg) | 0.146 |